

SMEC

LCV 850/1060

VERTICAL MACHINING CENTER



SMEC
SMEC America Corp.

14 West Forest Avenue Englewood, NJ 07631 USA
Office: +1 201-227-7632
Email: sales@esmecamerica.com


www.esmecamerica.com
www.youtube.com/smecmachinetoolsamerica



◆ Design and specifications subject to change without notice.

© SMEC 2019.09-NO.1

SMEC
SMEC America Corp.

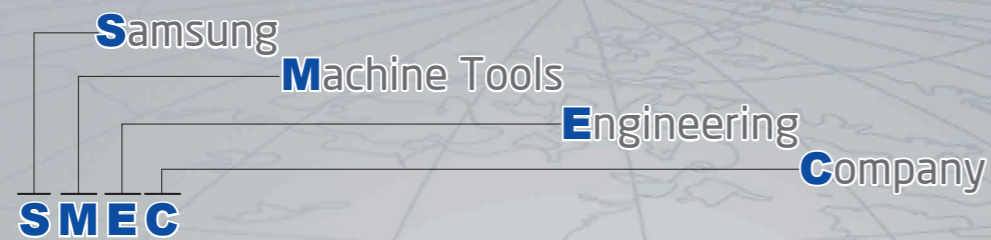

Company History

- **1988** - Started as **Samsung Heavy Industries** Machine Tools Business
- **1989** - Horizontal and vertical machining center technology partnership with **OKK Japan**
- **1991** - Turning center and vertical machining center technology partnership with **Mori Seiki**
- **1996** - 5-sided processing center technology partnership with **Toshiba**
- **1999** - Spun out from **Samsung Aerospace Industries** and established **SMEC Co., Ltd**
- **2018** - **SMEC America Corp** established to provide factory support to the distributor network and customers

SMEC'S Advanced Engineering and Machine Design

High Performance and Heavy Duty Machine Construction


- High speed, Ultra precision and high rigidity headstock
- Rigid one piece cast iron bed and wide box ways to support the saddle
- Largest machining capacity in its class
- High torque 2-speed gear box spindle drive system
- Easy chip removal and coolant washdown design

Description		LCV 850	LCV 1060
Table Size	inch	80.71 × 33.46	110.24 × 41.73
Travel(X/Y/Z)	inch	78.7/33.5/31.5	98.4/41.7/35.4
Spindle RPM	rpm	6,000	6,000
Spindle Power	Hp	25 / 20	25 / 20
Max. Table Load	lbs	6,600	11,000
Rapid Traverse Rate(X/Y/Z)	inch/min	787/787/630	630/630/630




LCV 850
LCV 1060

LCV 850 / 1060, One Piece Frame Design and High Rigidity Spindle Guarantee High Performance Machining

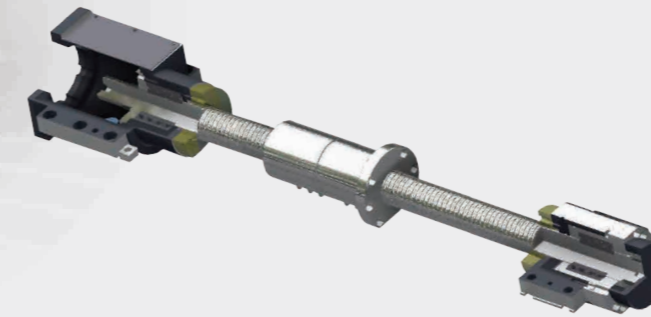


Large Size Ball Screws and Axis Drives

High precision double-nut ballscrews are centered between the guide ways, ensuring outstanding positioning repeatability with virtually no thermal growth.

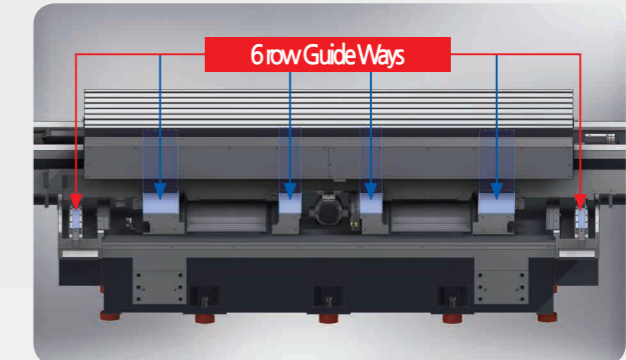

4 row Box guide ways and 2 row Roller Recirculating Units ensure table position accuracies and provide excellent support for the saddle preventing table overhang.

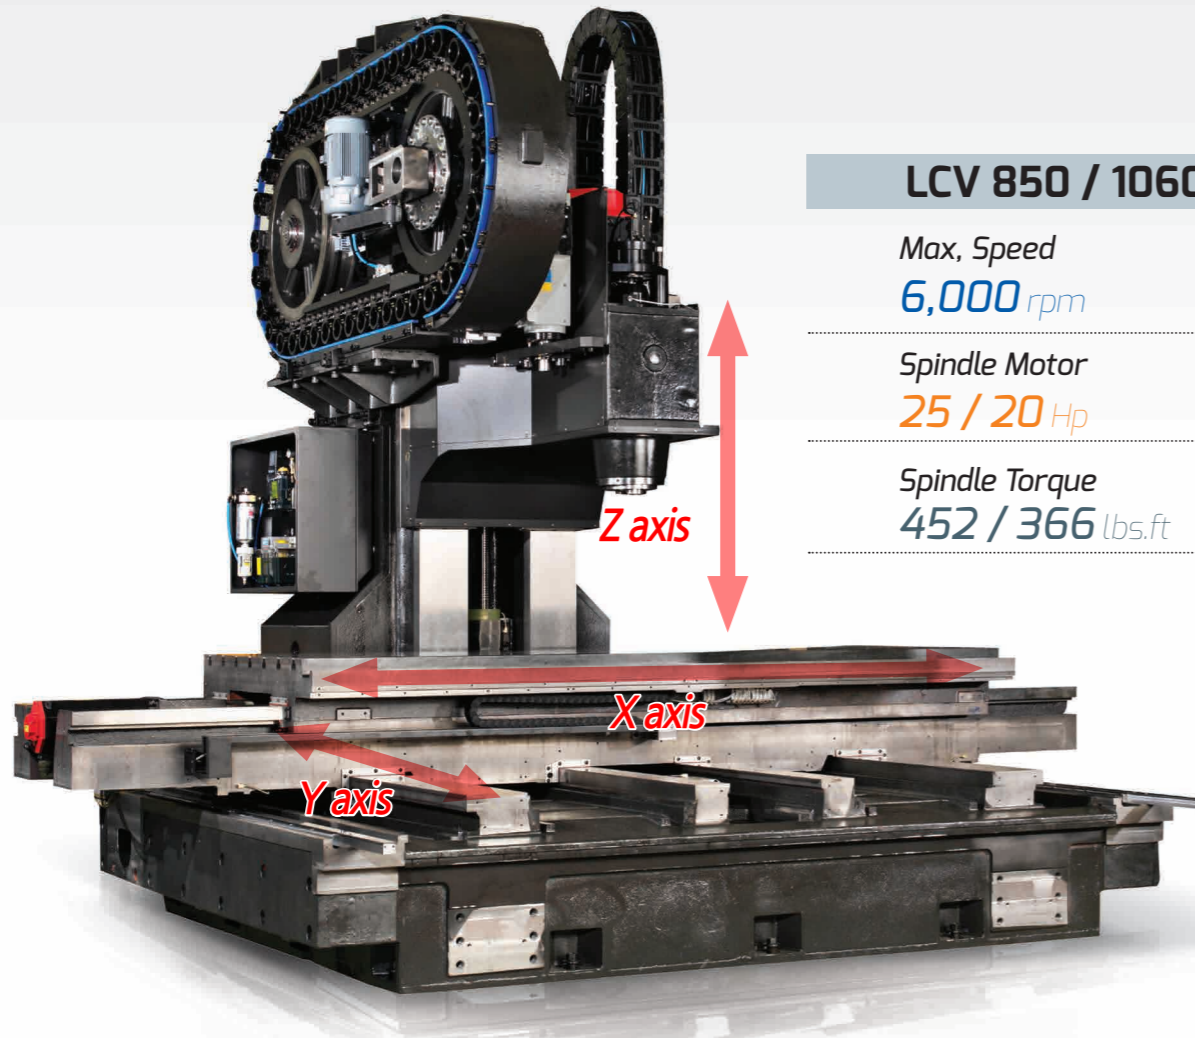

LCV 850 / 1060

Max, Speed


6,000 rpm

Spindle Motor


25 / 20 Hp

Spindle Torque


452 / 366 lbs.ft

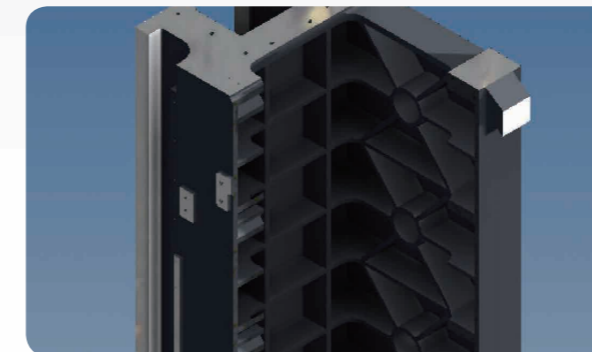


Highly rigid radial rib configuration provides high rigidity and vibration dampening during machining.

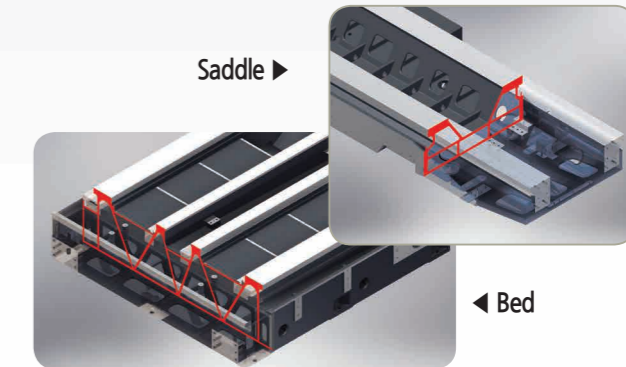

Rigid Box construction of the Bed and Saddle with properly arranged triangular truss Ribs provide minimal vibration even during heavy machining.

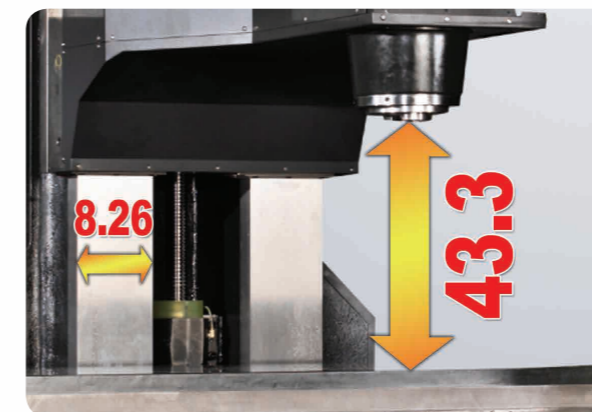

The largest Z-stroke of its class (35.43"), the headstock is supported by wide Z-axis guide ways (8.26"). (Image : LCV 1060)

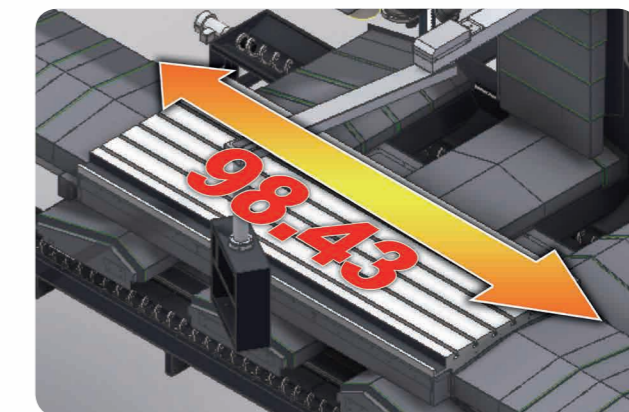

With the longest X-axis (98.4") of its class, LCV 1060 is capable of machining various size parts.

Rapid Traverse Speed (X/Y/Z)

LCV 850 : 787/787/630 inch/min


LCV 1060 : 630/630/630 inch/min

Table Size

80.71×33.46 inch

110.24×41.73 inch


2-Speed Geared Headstock, 6,000RPM

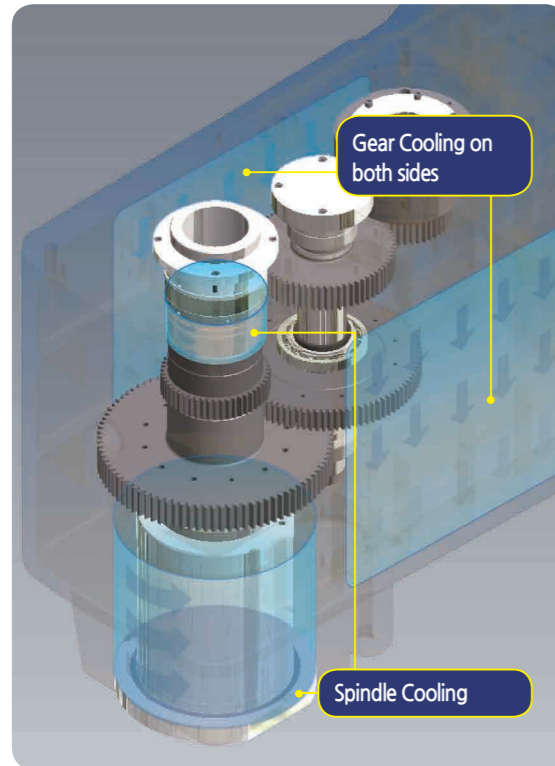

Optimized Thermal Expansion Prevention


With intergrated and complete headstock cooling system - separately cooling the spindle and gender(on both sides), minimal thermal expansion is accomplished

Spindle Power and Torque Diagram

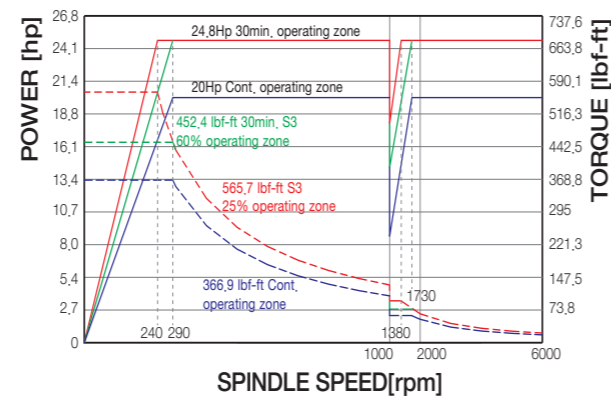


High Efficiency Spindle Oil Cooler Unit Maintains the Highest Spindle Accuracy

The Oil Cooler Unit keeps oil at room temperature and forces cooled oil to the heated areas of the spindle, maintaining constant temperature for high accuracy machining.

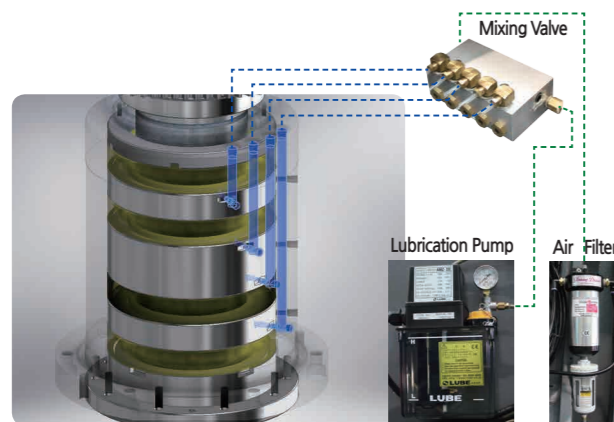

Spindle Bearing Air-Oil Lubrication

The spindle is lubricated by oil and air supplied by the metered lubrication pump and air filter. The mixing valve regulates the right amount of the oil and air to be dispated in to the spindle bearings.

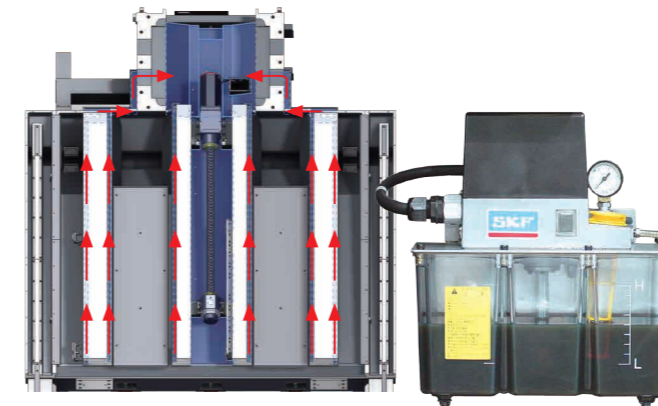

Lubrication Circulation System

The highly reliable line of products supply the right amount of lubricant to the guide ways through the metering valve. Waste lubricant is collected, increasing the life span of the lubricant and preventing decomposition of the cutting oil.



Centralized Pneumatic Utility Check

With the centralized utility check layout, operators can easily check operation status of lubrication, bearing fluid, air supply, etc.




Tool Change Time (T-T)

2.5 sec

Tool Magazine Capacity


40ea

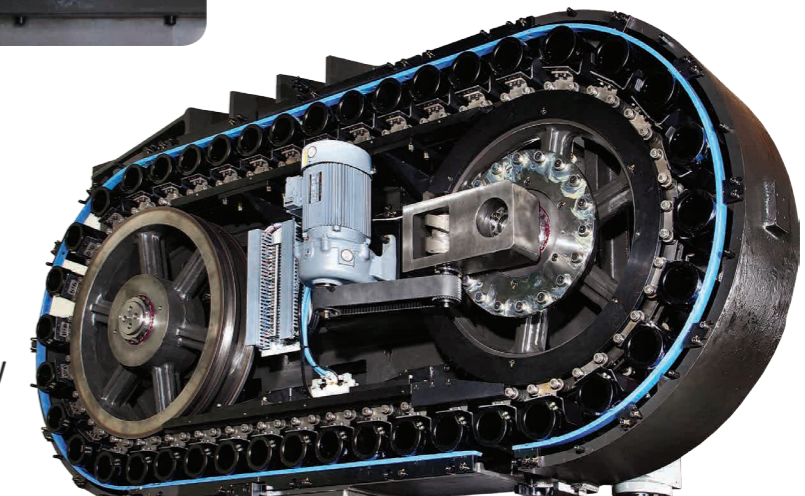

Machine Structure


Hydraulic Balance Cylinder

- Prevents Ball Screw overload due to the Head weight
- Maintains long-term rigidity by preventing the wear on Head Slide Ways

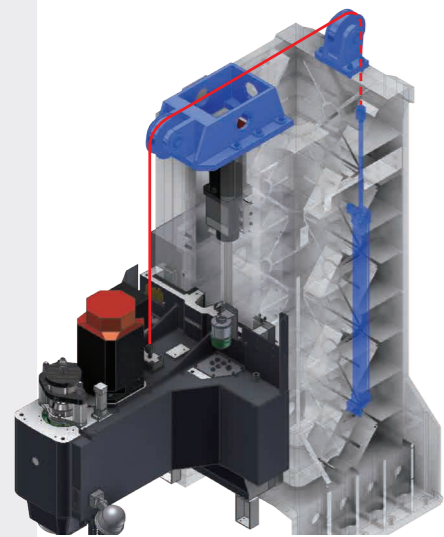

Rigid and Reliable Body Structure


- Stable base and column construction
- Wide induction hardened and precision ground box guide ways

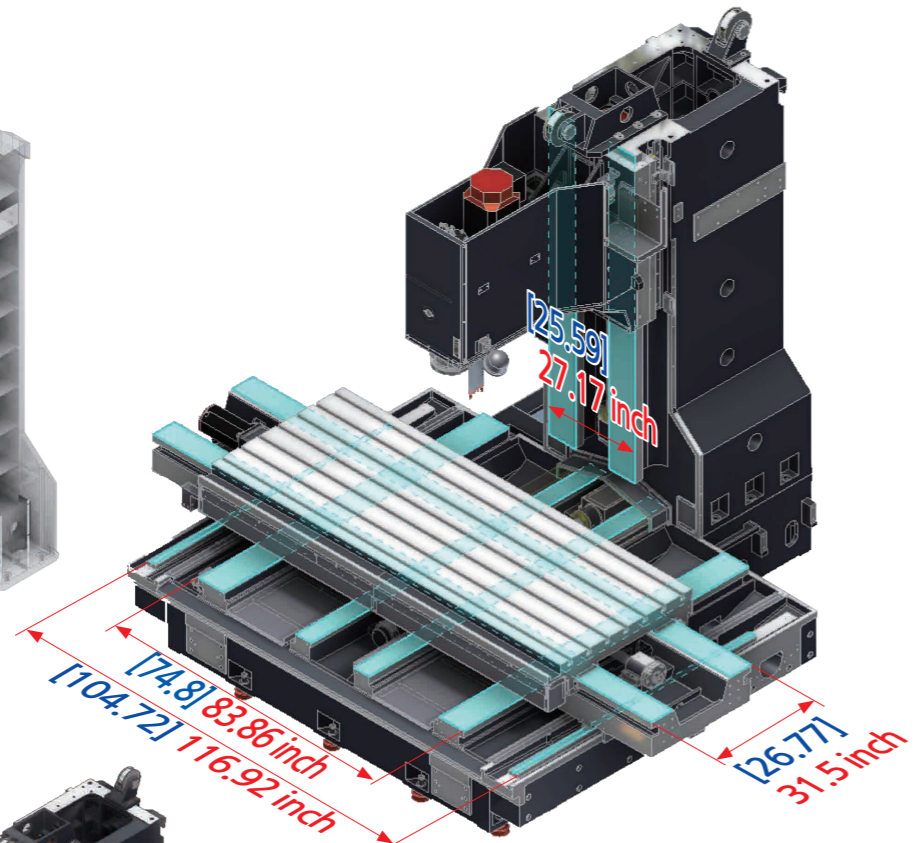

[]: LCV 850

Easy and Efficient Chip Disposal Design

High volume of flushing coolant allows minimal chip build-up, and slanted splash guard design effectively moves chips in to the screw type built-in conveyors.

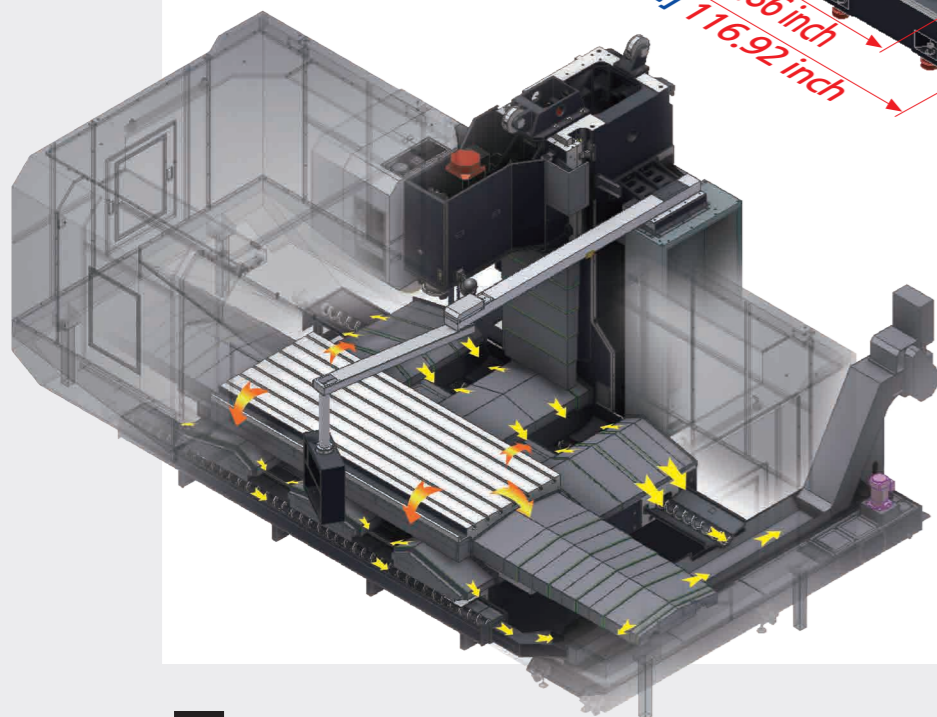


Machine Structure



Centralized Control Panel

- 10.4 inch color LCD
- Semi permanent LED LAMP
- Easy to operate and access Pendant Arm and mobile MPG

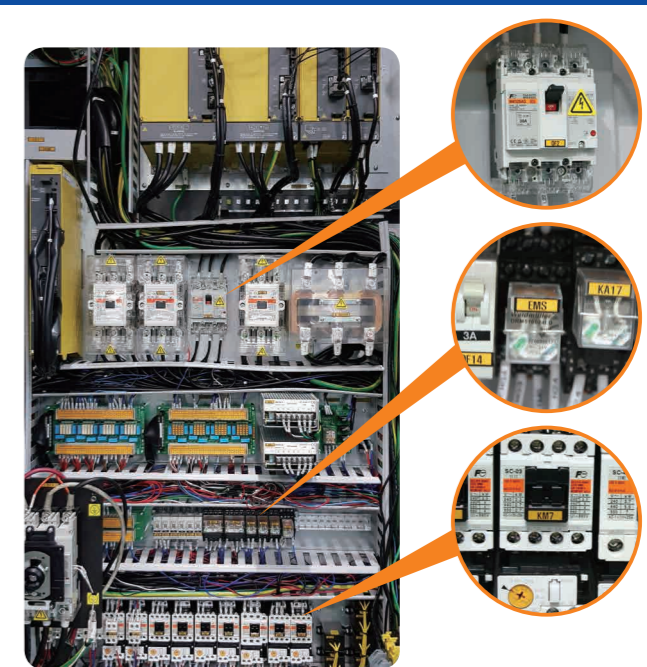

Electric Cabinet Made with Highly Reliable Components

- Magnet switch, circuit breaker, Schneider
- Relays (Widemuller, Omron)

FANUC Manual Guide i Software


Equipped with standard FANUC Manual Guide i software, program simulation and checking finished work pieces is now easier than ever.

Program Simulation

Program simulation thru three-dimensional graphic

Concise and easy to see display

Easy to see the entire process with concise control screen display.

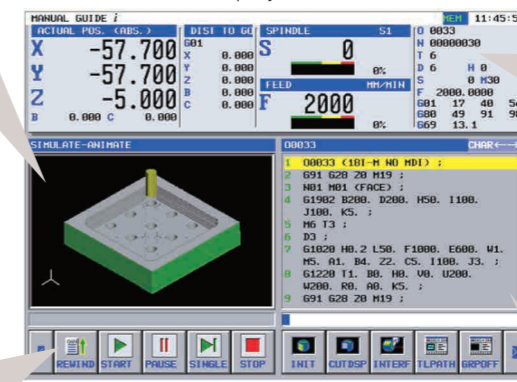

Simple and User Friendly Control Panel

Menu buttons for user friendly operation

Current Operation panel


The panel offers basic information such as axis position and spindle speed.

Convenient Programming System

Easy program inputs by ISO code based programming.

Nano Smoothing (F0i-MF, F31i : Option)

Produce smoother machined surfaces using NURBS curves created through nano interpolation

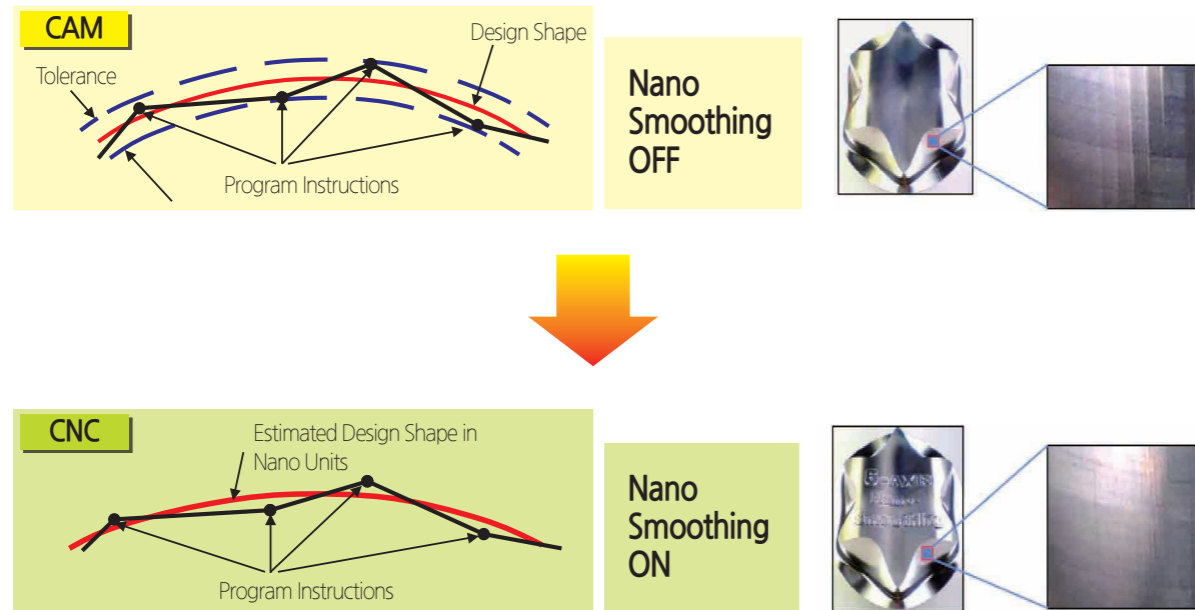

Adjust quality of machined surface using Nano Smoothing(F0i-MF, 31i : Option)

Cursor key Operation

High Accuracy High Speed High Quality

Using cursor key operations to easily switch between high accuracy, high speed and high quality machining.

High Precision

Unit : inch

Conditions	
Machine	LCV 1060
Material	A 1050P
Tool	Ø0.98x4T
Spindle Speed	1,500RPM
Depth of Out	0.004inch
Work Size	Ø7.09
Cutting Feedrate	11.81inch/min




Accessories (Option)




Machine Dimensions

Unit : inch

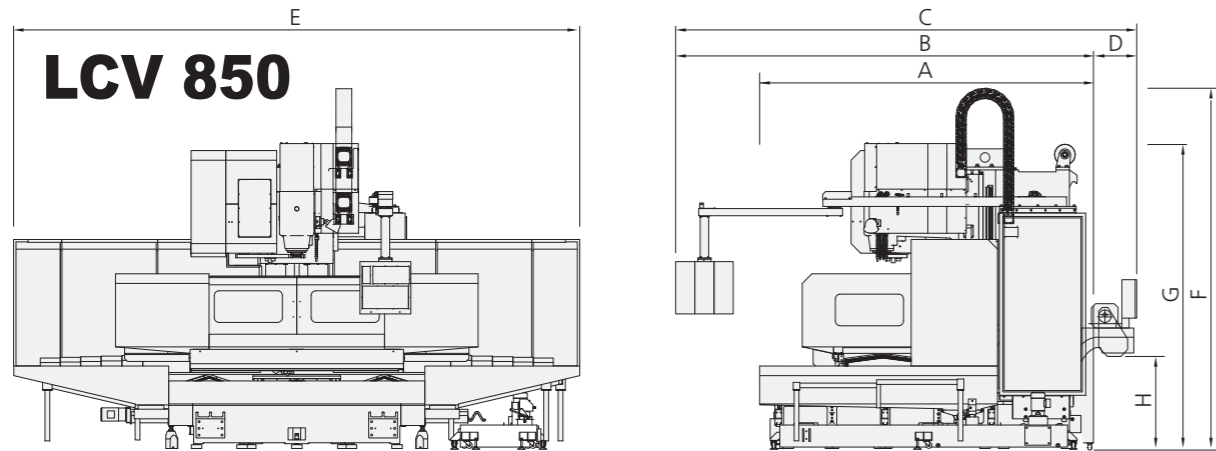



DESCRIPTION	A (wide)	B (with controller box)	C (max. wide)	D (with chip conveyor)	E (length)	F (height)	G (shipping height)	H (discharge)
30/40 MG Full cover	140.78	171.61	188.54	19.09	216.53	147.87	123.3	32.79
30/40 MG Half cover	137.24	170.82	188.54	19.09	232.36	147.87	122.95	32.79

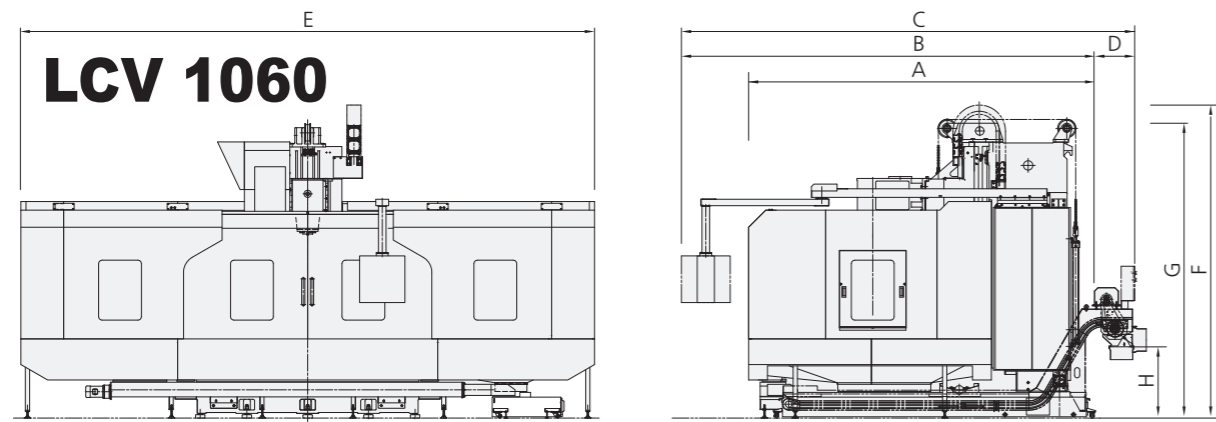

DESCRIPTION	A (wide)	B (with controller box)	C (max. wide)	D (with chip conveyor)	E (length)	F (height)	G (shipping height)	H (discharge)
30/40 MG	159.48	183.11	208.66	18.11	263.77	144.09	133.26	32.79


Table & T-Slot

Unit : inch

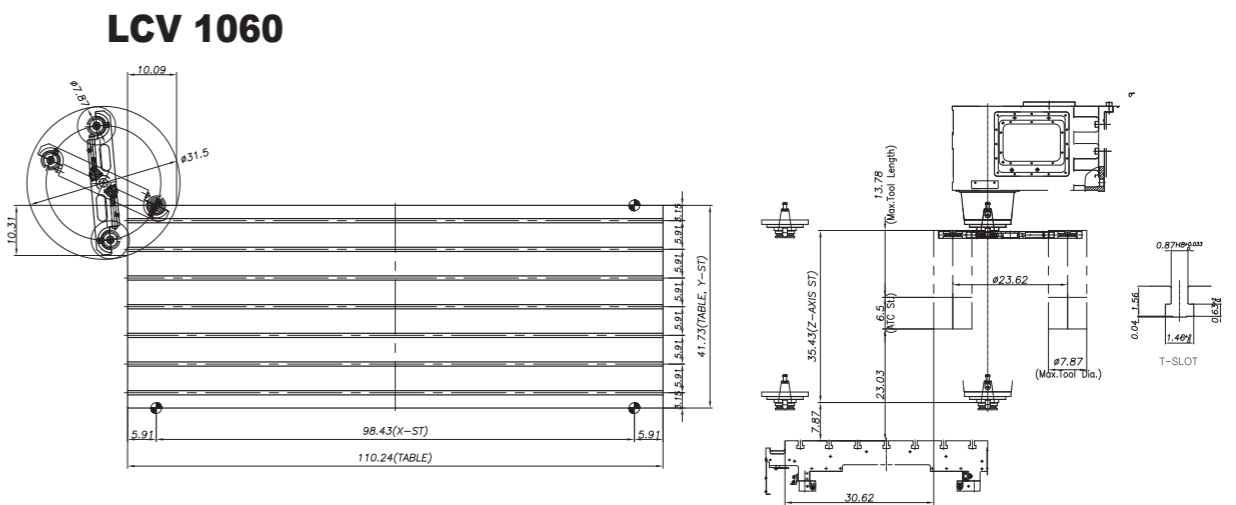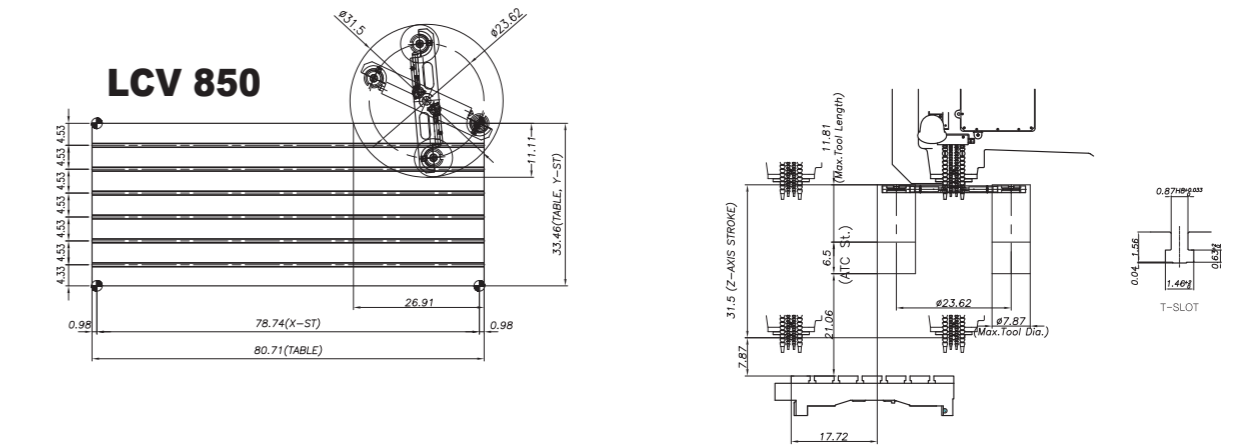

Tool Shank

Unit : inch

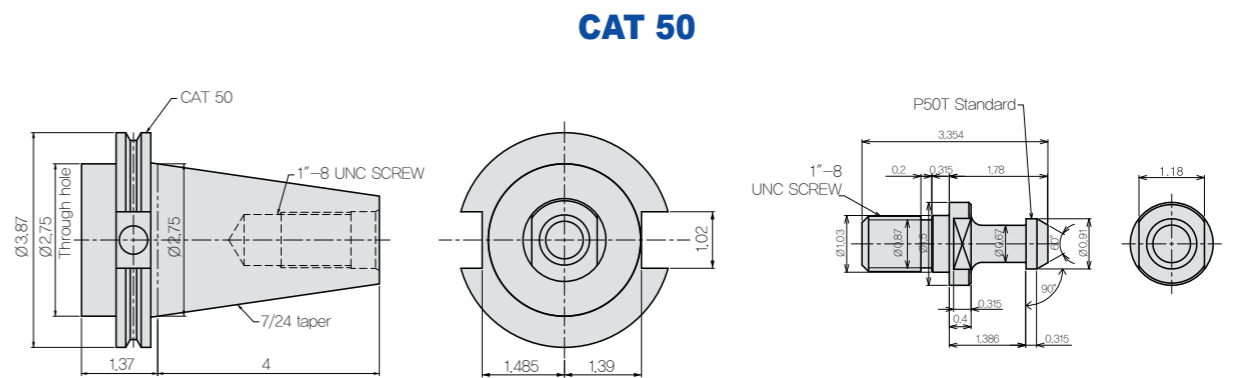

■ Machine Specification

DESCRIPTION			LCV 850	LCV 1060
TRAVEL	X-axis	inch	78.7	98.4
	Y-axis	inch	33.5	43.3
	Z-axis	inch	31.5	35.4
	Distance from table surface to spindle nose	inch	7.9 ~ 39.4	7.9 ~ 43.3
TABLE	Working Surface	inch	80.7×33.5	110×41.7
	Loading capacity	lbs	6,600	11,000
SPINDLE	Max. Spindle Speed	rpm	6,000	6,000
	Spindle Type	-	2Step Gear Drive	2Step Gear Drive
	Taper	-	NT50	NT50
	Bearing inner diameter	inch	Ø3.9	Ø3.9
	Motor(30min/const.)	hp	25 / 20	25 / 20
	Torque	lbs.ft	452 / 366	452 / 366
FEEDRATE	Rapid Traverse(X/Y/Z)	inch/min	787 / 787 / 630	630 / 630 / 630
	Feedrate(X/Y/Z)	inch/min	0.039 ~ 394	0.039 ~ 394
	Slideway Type	-	Box Way	Box Way
ATC	Tool Shank	-	CAT50	CAT50
	Pull Stud Type	-	90° Type	90° Type
	Tool Changing Time(T-T)	sec	2.5	2.5
	Magazine Capacity	ea	40	40
	Tool Selection	-	Memory Random	Memory Random
	Tool Weight/Length	lbs/inch	35.2 / 11.8	33 / 13.8
	MOTORS	Coolant Pump Motor	hp	0.5
Lubricant Pump(for Sliding Surface)		hp	0.024	0.024
OTHER	Air Pressure	psi	58 ~ 87	58 ~ 87
	Air Supply Capacity	gal/min	44	44
	Coolant Tank Capacity	gal	142	170
	Lubricant Tank	gal	0.8	1.3
Power Supply	kVA	48	48	
Floor Space(L×W×H)	inch	165.6×232.3×147.7	178.9×263.8×144	
Machine Weight	lbs	39,700	55,200	
CNC System	Fanuc 0i-MF			

• Figures in inches are converted from metric measurements. • Design and specifications subject to change without notice.

■ Standard Accessories

- TOOL AND TOOL BOX
- WORK LIGHT
- 3AXIS MPG
- COOLANT SYSTEM AND TANK
- FULL SPLASH GUARD(NO TOP COVER)
- 40 MAGAZINE(LCV 850 / 1060)

■ Optional Accessories

- CHIP CONVEYOR
- THRU SPINDLE COOLANT
- AUTO TOOL LENGTH MEASUREMENT
- DATA SERVER
- ROTARY TABLE 4thAXIS, 5thAXIS
- LINEAR SCALE

■ NC Unit Specifications / FANUC 0i-MF

Item	Specification	F 0i-MF
Controlled axis	feed axes	X,Y,Z,(A,B)
	Max. feed axes	4(6) AXIS
	Max. simultaneously controlled axis	4
	Least command increment	0.001mm / 0.0001"
Operation functions	Pulse handle feed	X1, X10, X100
	Feedrate per minute	G94
	Feedrate per revolution	G95
Interpolation functions	Linear interpolation	G01
	Circular interpolation	G02, G03
	Dwell	G04
	Cylindrical interpolation	G70.1
	Reference position return	G28
	Reference position return check	G27
Feed function	Rapid traverse rate override	F0, 25%, 50%, 100%
	Feedrate override	0~200%
Spindle function	Spindle orientation	○
	Rigid tapping	○
Tool functions	Tool number command	T4-Digt / T2-Digt
	Tool nose radius compensation	G40 ~ G42
	Tool offset pairs	400
	Tool geometry/wear offset	GEOMETRY & WEAR DATA
	Tool life management	○
	Tool path graphic display	○
	Automatic tool length measurement	○
Program input	Absolute/incremental programming	○
	Multiple repetitive cycle	G70 ~ G76
	Canned cycles	G90, G92, G94
	Inch/metric conversion	G20 / G21
	Program restart	○
	Retraction for rigid tapping	○
	Max. programmable dimension	±99999.999mm/±9999.9999"
	M function	M3 digit
	Custom macro	○
	Canned cycle for drilling	○
	Direct drawing dimension programming	○
	Programmable data input	G10
	Optional block skip	○
	Workpiece coordinate system	G52 ~ G59
	Number of registerable programs	400EA
Setting and display	Alarm & Operator histor display	ALARM & OPERATION DISPLAY
	Run hour and parts count display	RUNNING TIME & PART NO. DISPLAY
	Display spindle & servo overload	SPINDLE & SERVO LOAD DISPLAY
	Self-diagnosis function	○
	Extended part program editing	COPY,MOVE, CHANGE OF NC PROGRAM
Display screen	10.4" color	
Data input/output	Memory card input/output	○
	USB memory input/output	○
Editing operation	Part program storage size	512Kbyte(1280m)
Manual guide i	Manual Guide I	Opt.